

AD-AD23 501

RIA-76-U275

Cy No. 1

# TECHNICAL LIBRARY

AD

A023501

R-TR-76-011

USADACS Technical Library



5 0712 01001501 3

THREE DEFINITIONS

OF

BEST LINEAR APPROXIMATION

by

JAMES J. HURT

1 APRIL 1976



PREPARED BY

RESEARCH DIRECTORATE

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

PREPARED FOR

RESEARCH DIRECTORATE

**GENERAL THOMAS J. RODMAN LABORATORY  
ROCK ISLAND ARSENAL  
ROCK ISLAND, ILLINOIS 61201**

DISCLAIMER

The findings of this report are not to be construed as an official department of the Army position, unless so designated by other authorized documents.

DISPOSITION INSTRUCTIONS


Destroy this report when no longer needed. Do not return to the originator.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER R-TR-76-011	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle)  Three Definitions of Best Linear Approximation		5. TYPE OF REPORT & PERIOD COVERED  Final
7. AUTHOR(s)  James J. Hurt		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS  Research Directorate, SARRI-LR-S GEN Thomas J. Rodman Laboratory Rock Island Arsenal, Rock Island, IL 61201		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS  1T161101A91A
11. CONTROLLING OFFICE NAME AND ADDRESS  DAMA-ARZ-B Chief of Research and Development HQ, Department of the Army		12. REPORT DATE  1 Apr 76
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		13. NUMBER OF PAGES  21
		15. SECURITY CLASS. (of this report)  UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)  Data Approximation                          Mean Values Linear Approximation                        Covariance Matrix Least Squares Approximation              Correlation Coefficient Statistics		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)  Three definitions of best (in the least squares sense) linear approximation to given data points are presented. The relationships between these three are discussed along with their relationship to basic statistics such as mean values, the covariance matrix, and the (linear) correlation coefficient. For each of the three definitions, the best line is solved in closed form in terms of the data centroid and the covariance matrix.		




TABLE OF CONTENTS

	<u>PAGE</u>
1.0 INTRODUCTION . . . . .	1-1
2.0 NOTATION AND SOME PRELIMINARY RESULTS . . . . .	2-1
3.0 FIRST DEFINITION OF BEST LINEAR APPROXIMATION . . . . .	3-1
4.0 SECOND DEFINITION OF BEST LINEAR APPROXIMATION . . . . .	4-1
5.0 GEOMETRIC BEST LINEAR APPROXIMATION . . . . .	5-1
6.0 REVIEW OF THE THREE DEFINITIONS . . . . .	6-1
A.0 APPENDIX - PROGRAM LISTING . . . . .	A-1

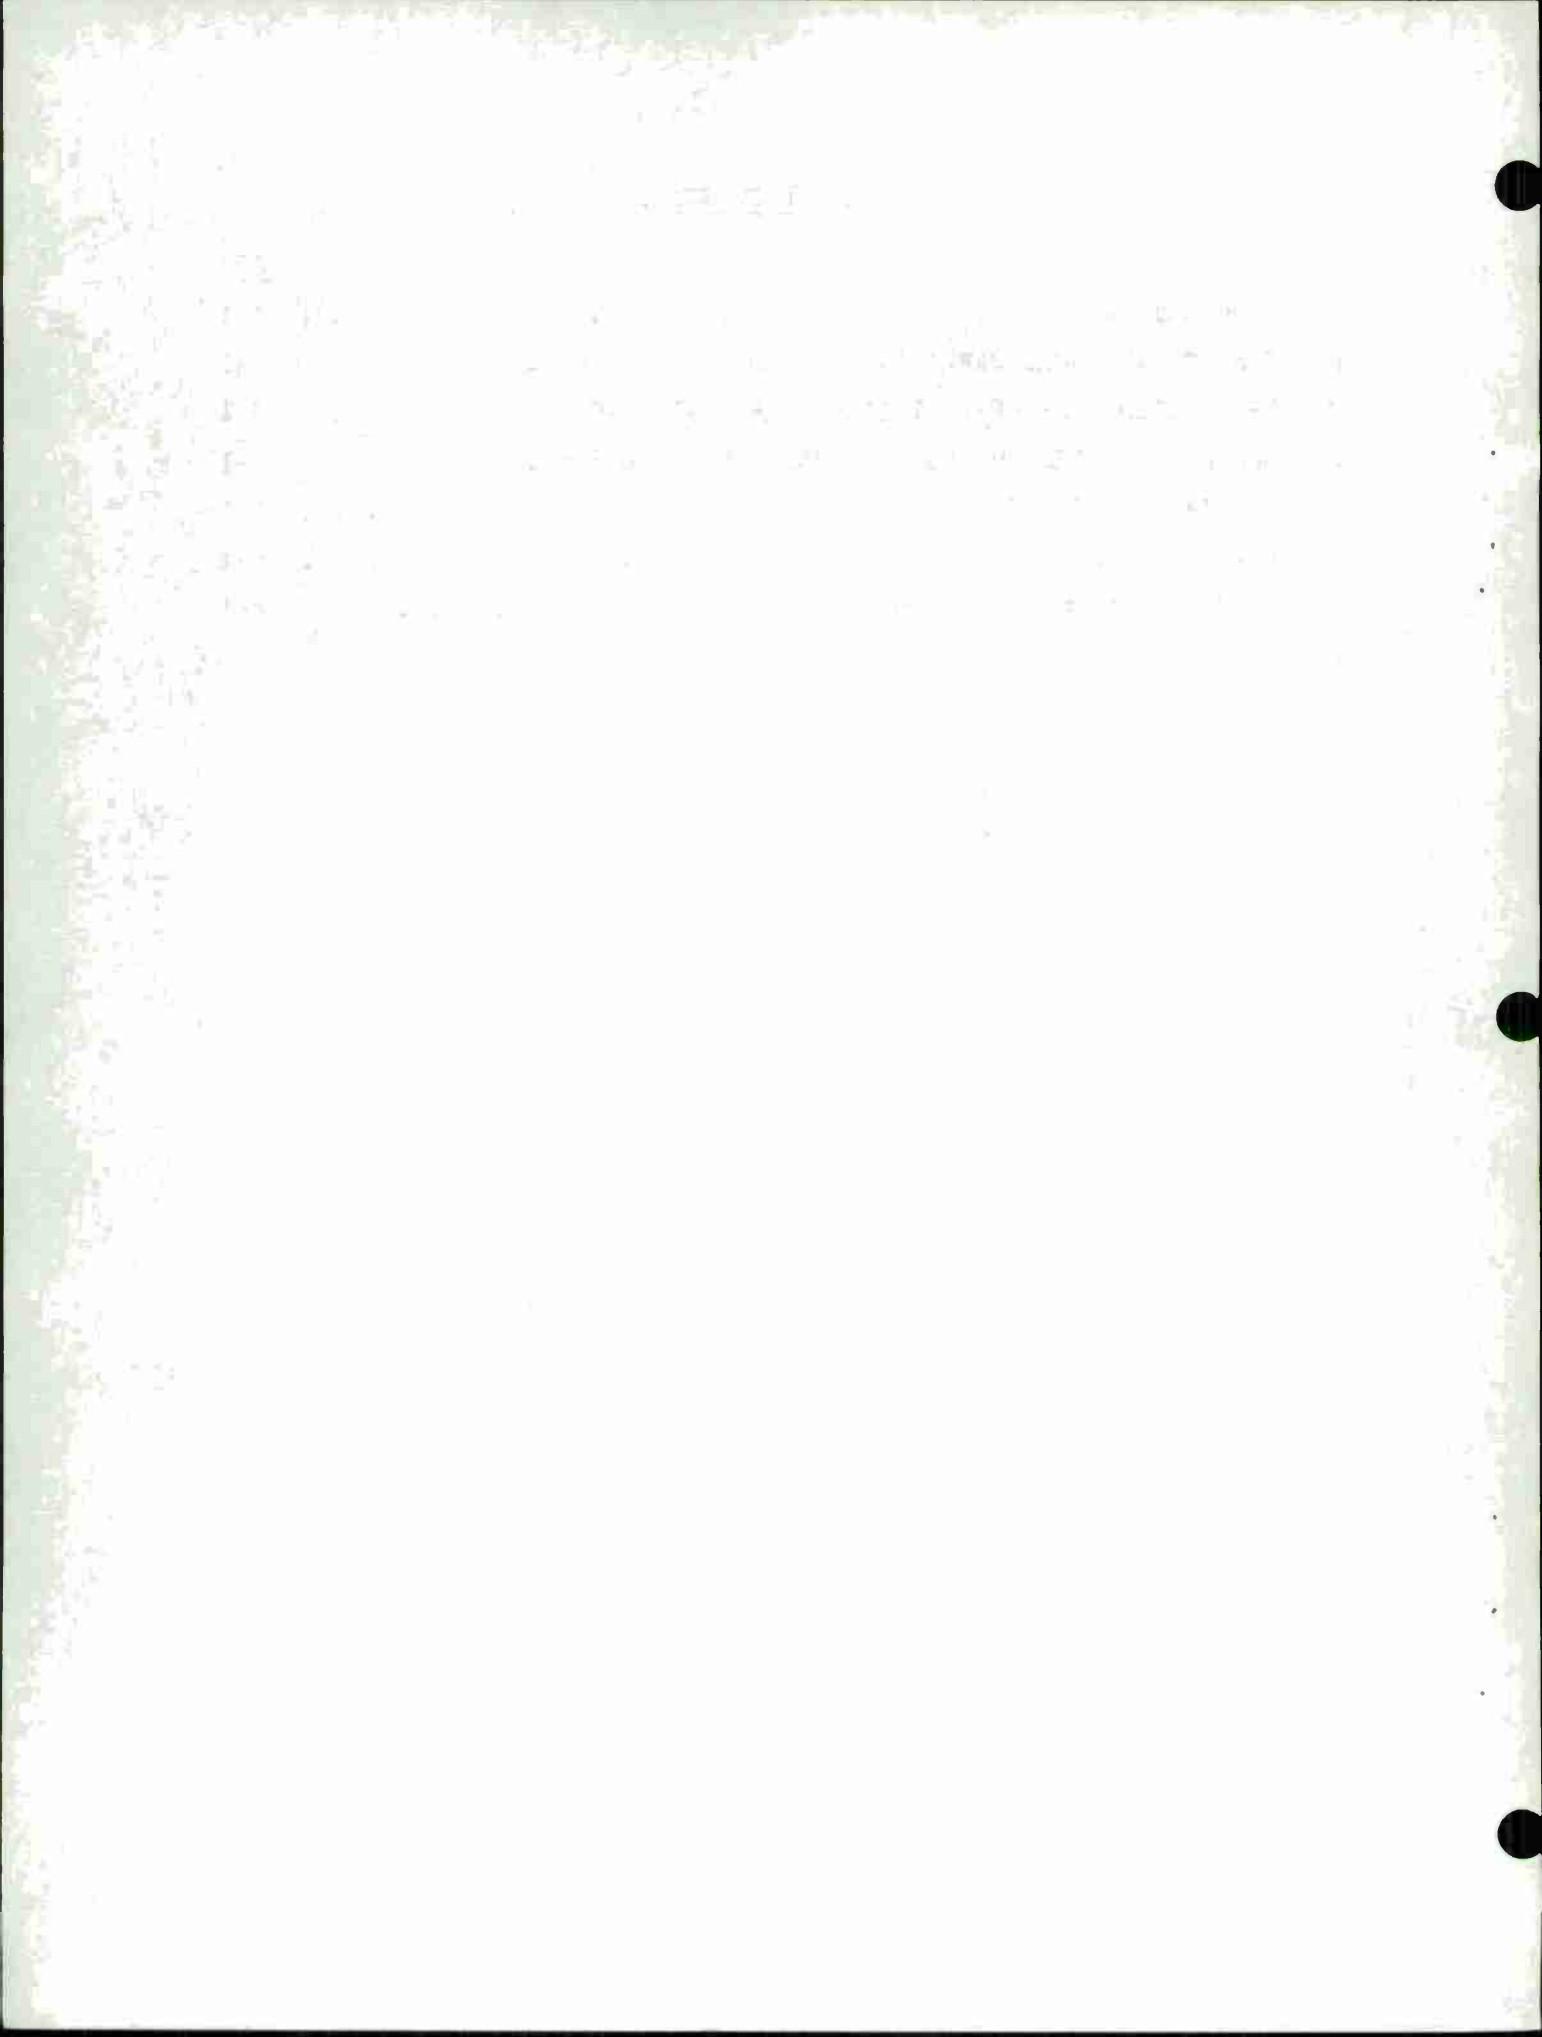


LIST OF FIGURES

<u>FIGURE</u>		<u>PAGE</u>
1	Geometric Definition of $r$ and $u_0$ . . . . .	5-4
2	Three Distances From a Point to a Line . . . . .	6-2
3	Plot of Raw Data for Example . . . . .	6-5

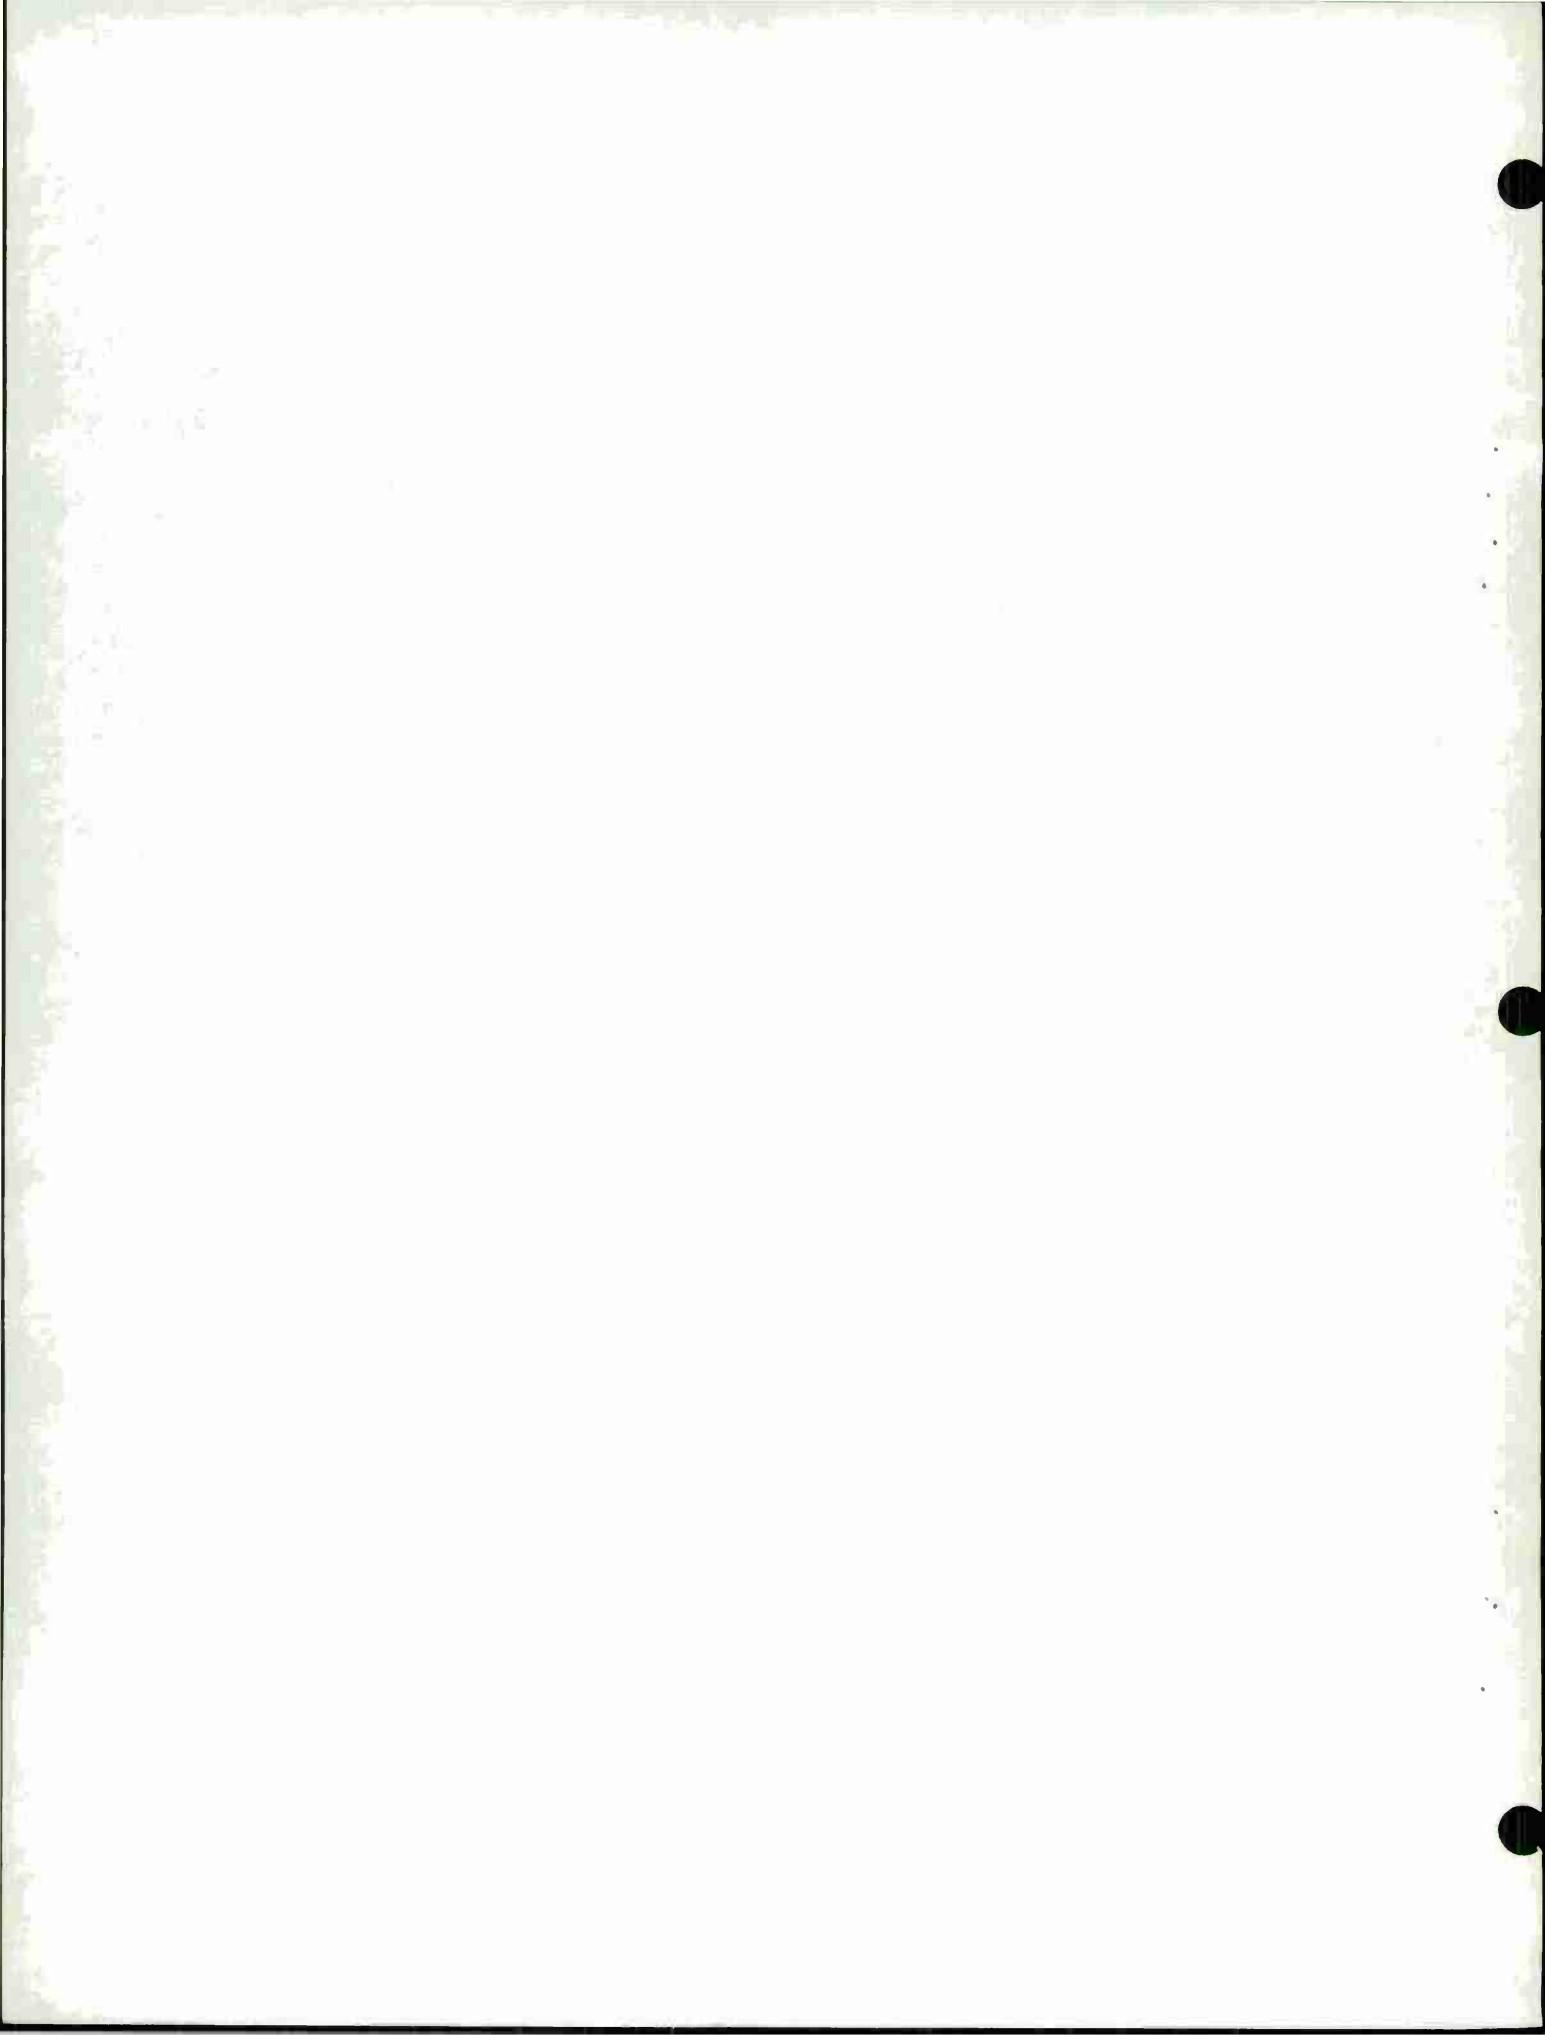


LIST OF TABULAR DATA

<u>TABLE</u>		<u>PAGE</u>
1	RAW DATA FOR EXAMPLE 1 . . . . .	6-4
2	RAW DATA FOR EXAMPLE 2 . . . . .	6-7

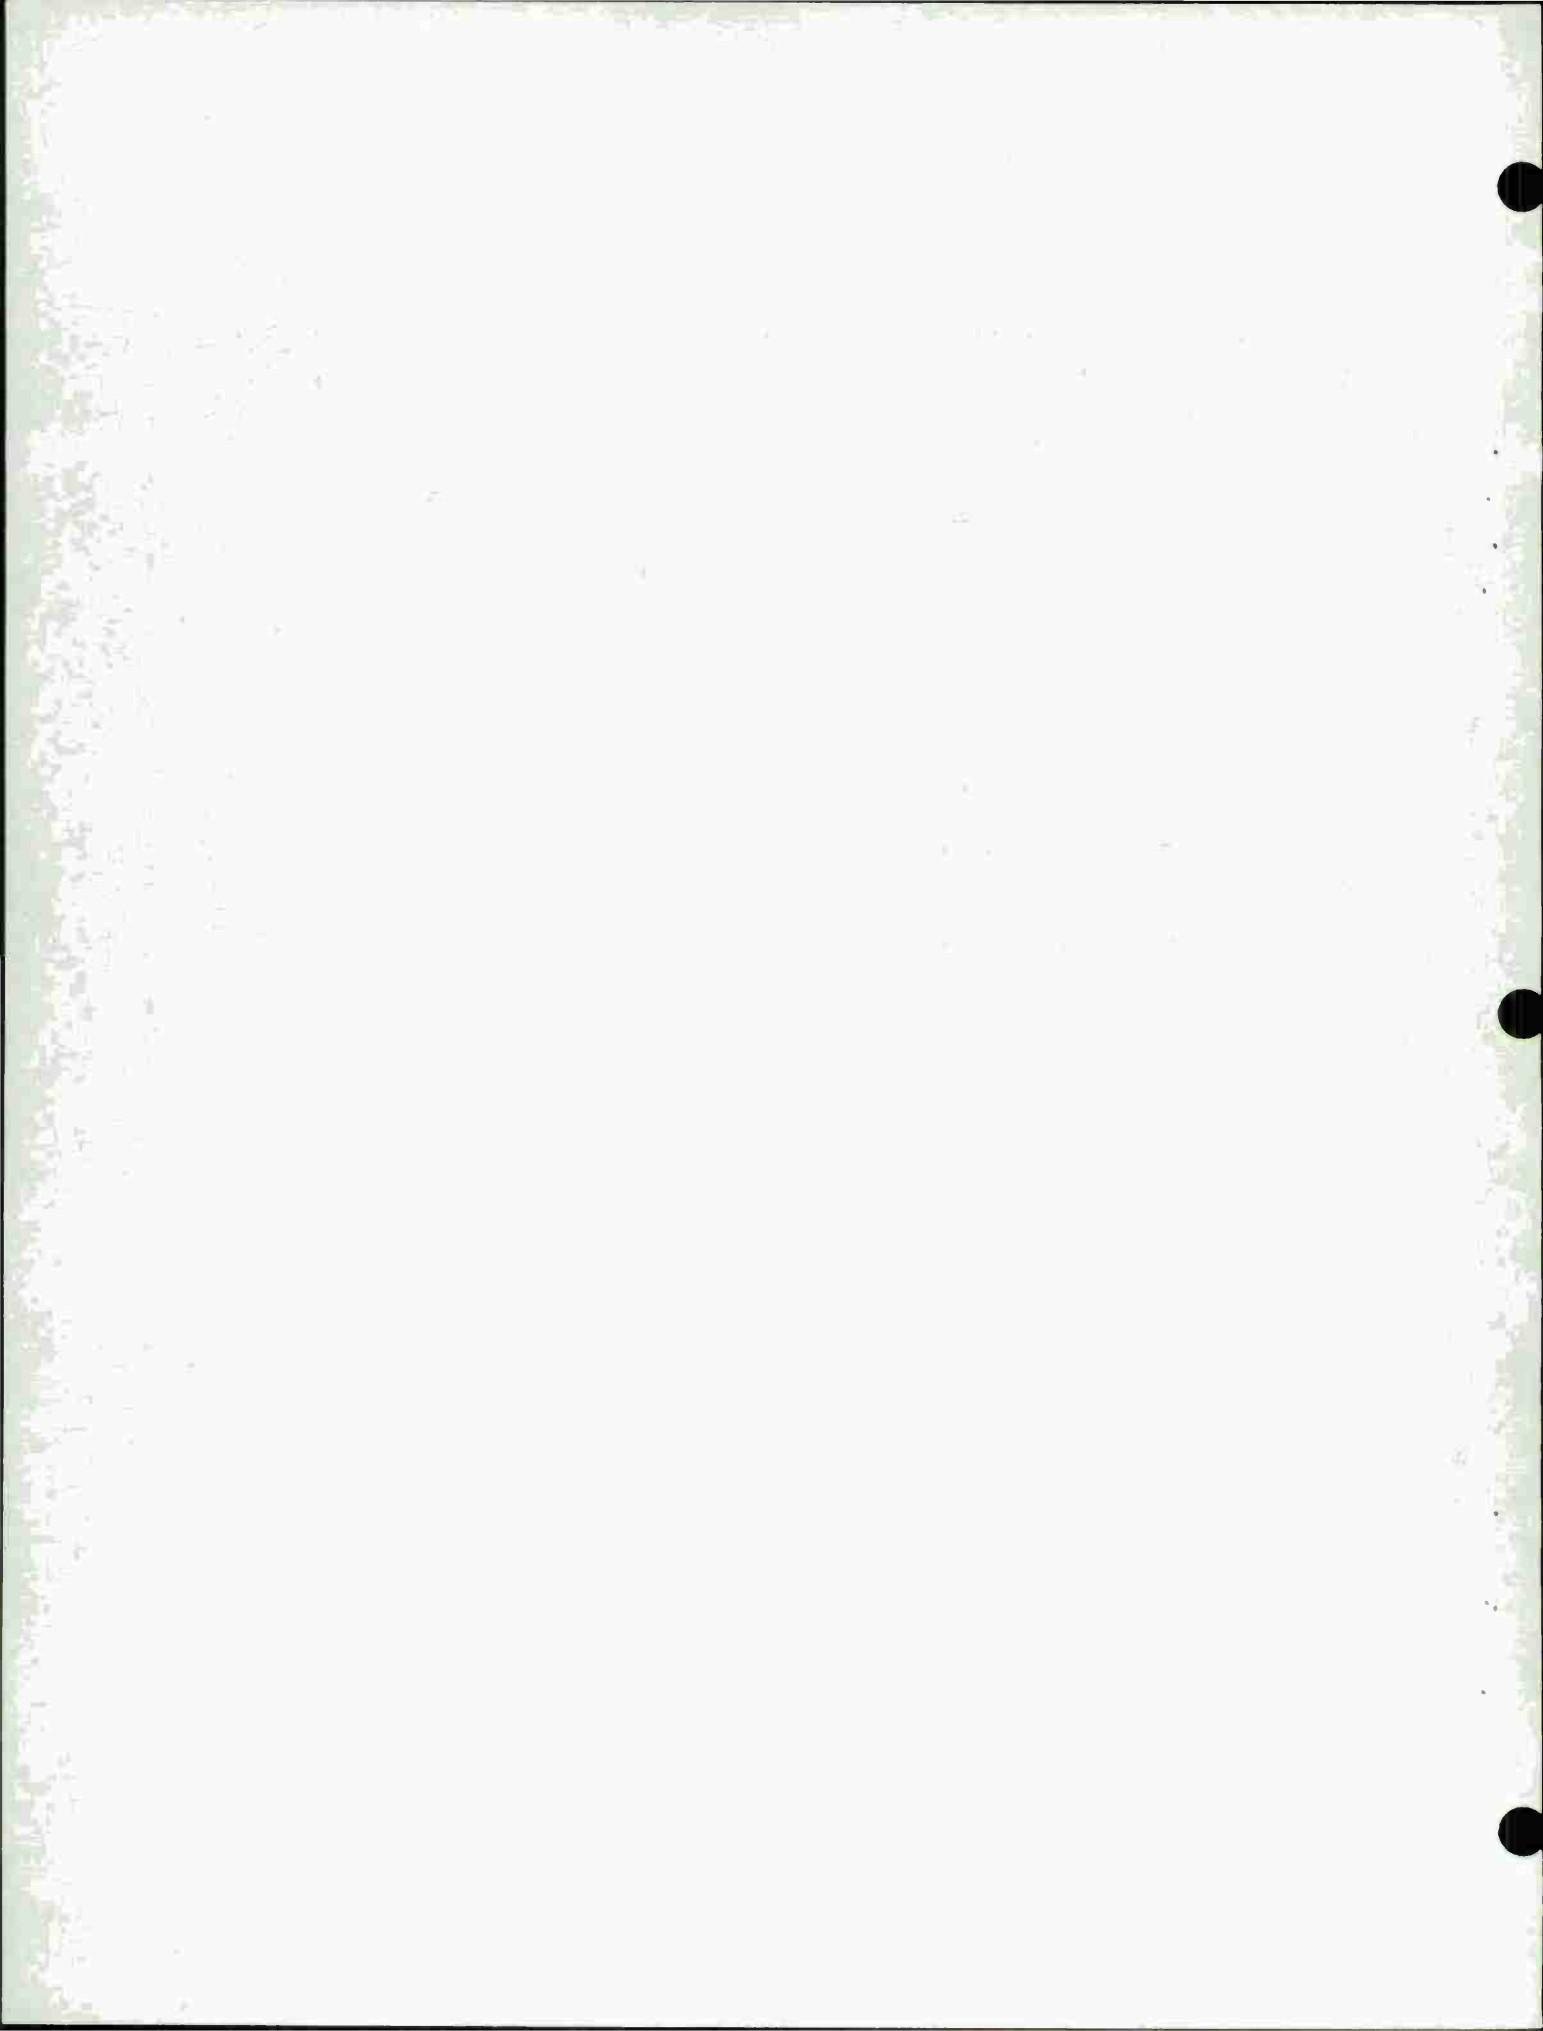

## 1.0 INTRODUCTION

The problem frequently arises in practice where  $n$  data points,  $(x_1, y_1)$ ,  $(x_2, y_2), \dots$ , and  $(x_n, y_n)$ , are given. These points can be plotted on an  $x$ - $y$  graph giving a scattergram of the data. The problem is to find the line that gives a "best" approximation to the data, and to determine the "quality" of this approximation. In the following paragraphs, three definitions of a "best" approximation are given, the corresponding solutions for the best line are derived, and an expression for each "quality" is determined. In the process, the relationship between this data approximation problem and elementary statistics will also be revealed.

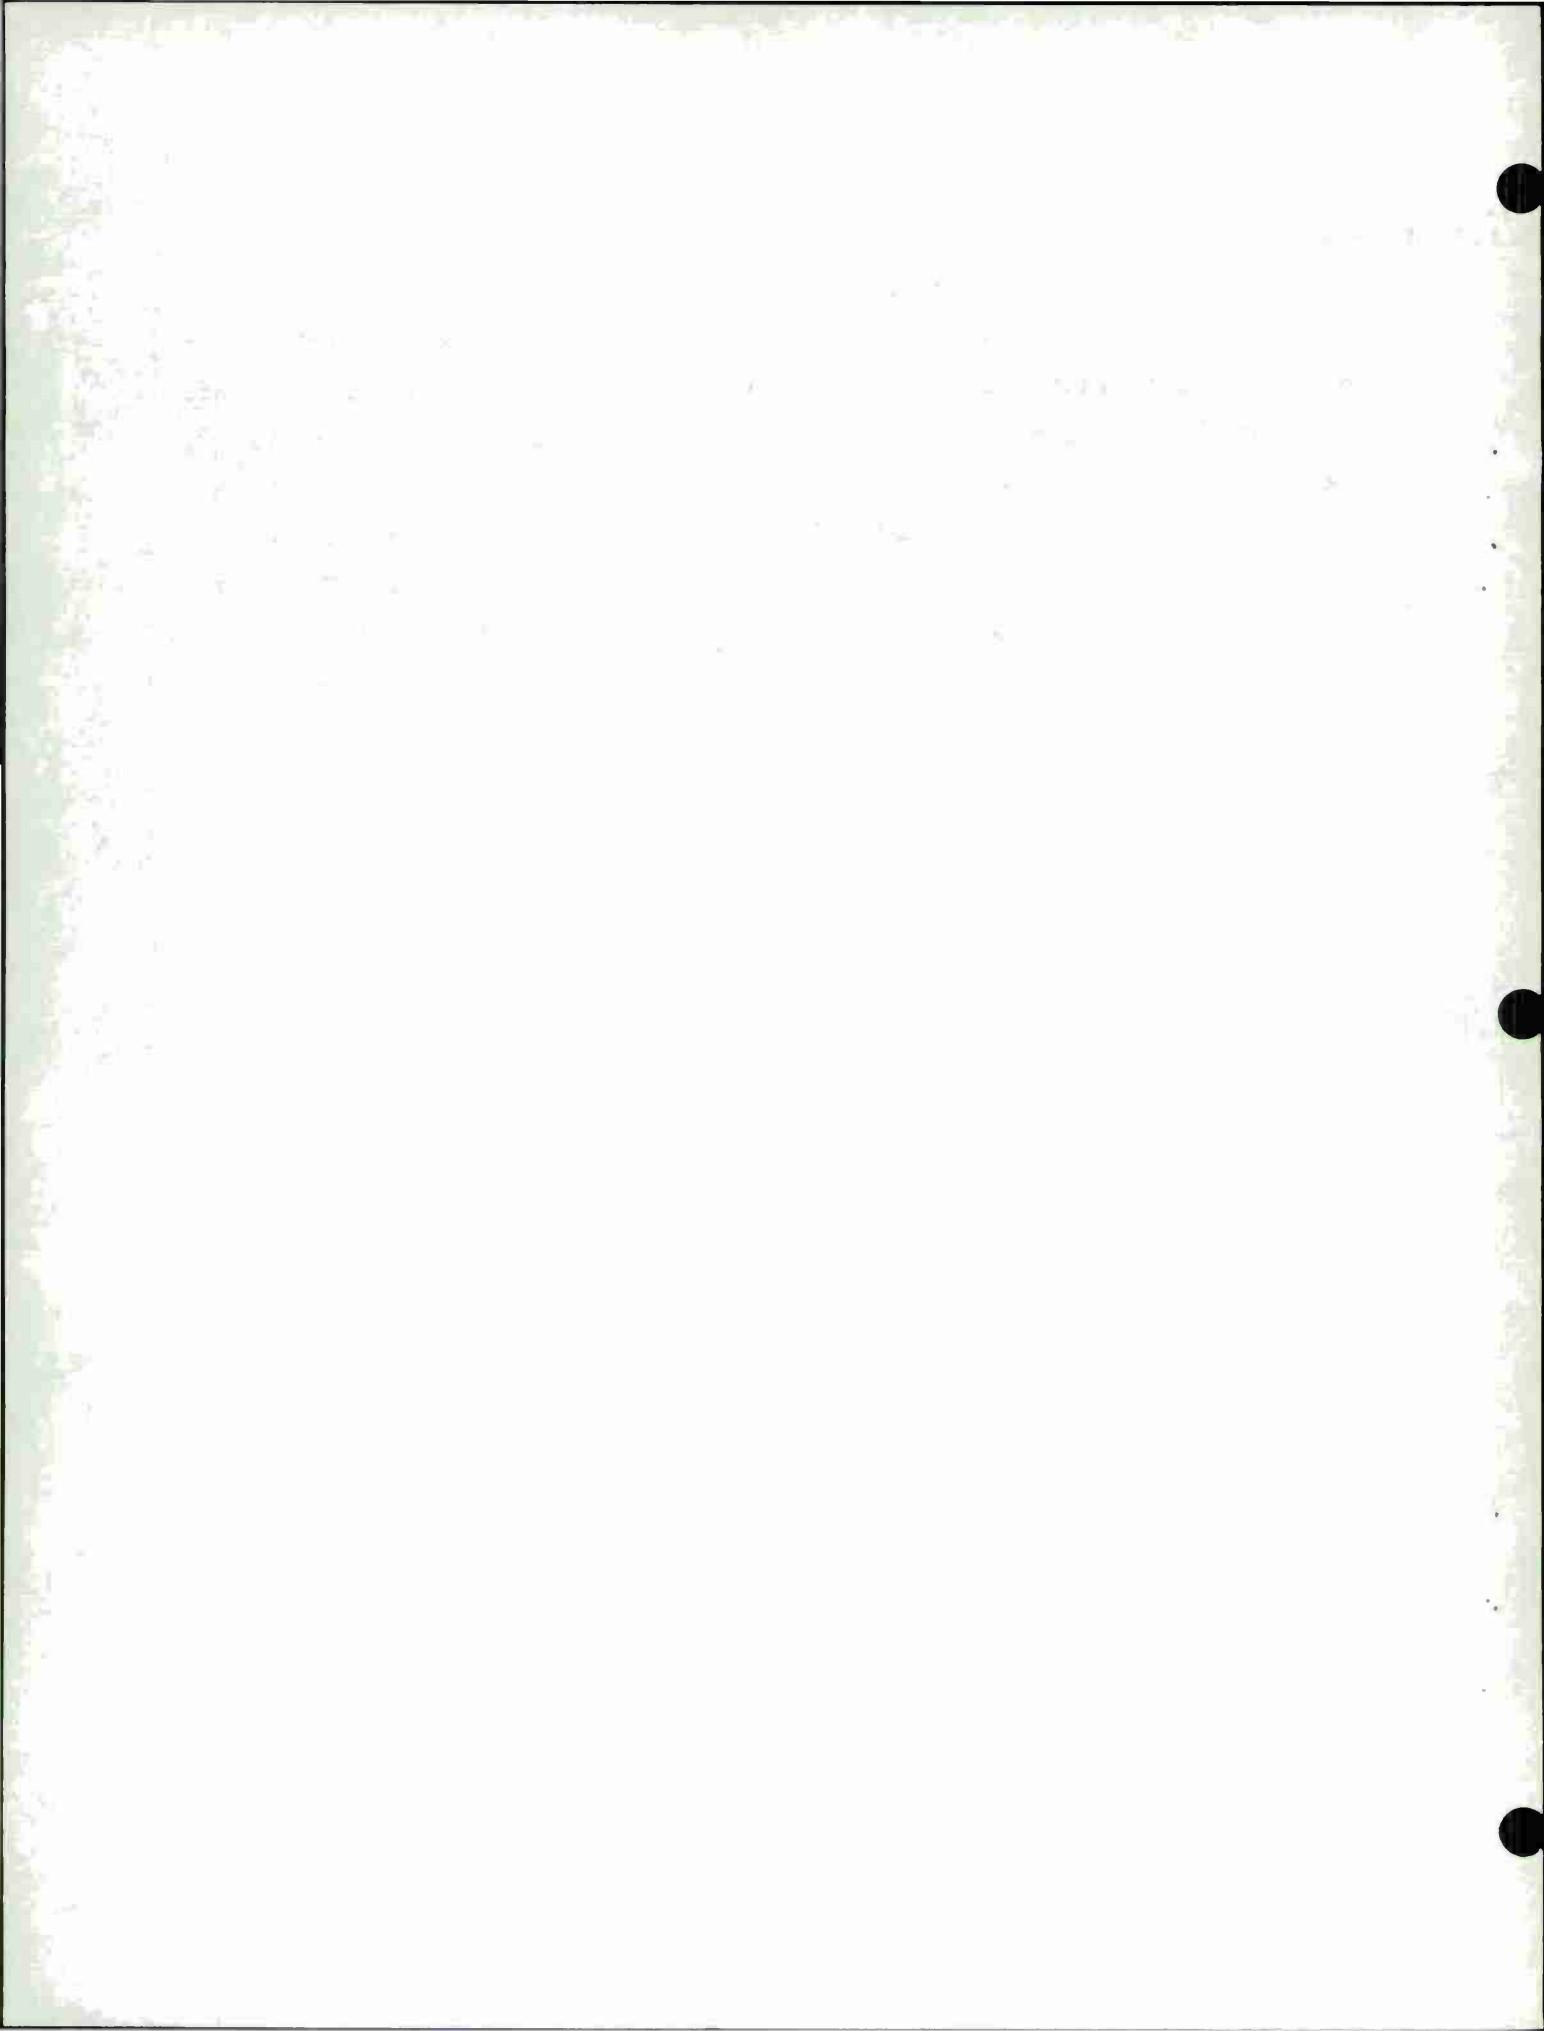

## 2.0 NOTATION AND SOME PRELIMINARY RESULTS

Since the subject matter involves many sums from  $i = 1$  to  $n$ , the following shorthand notation will be used:

$$\sum x_i = x_1 + x_2 + \dots + x_n$$

No limits are indicated on the  $\sum$  summation sign since the limits  $i = 1$  and  $i = n$  are understood.

The following elementary statistics about the data are needed:

$$\mu_x = \frac{1}{n} \sum x_i = \text{mean of } x_i \quad (2.1)$$

$$S_{xx} = \frac{1}{n} \sum (x_i - \mu_x)^2 = \text{variance of } x_i \quad (2.2)$$

$$\mu_y = \frac{1}{n} \sum y_i = \text{mean of } y_i \quad (2.3)$$

$$S_{yy} = \frac{1}{n} \sum (y_i - \mu_y)^2 = \text{variance of } y_i \quad (2.4)$$

$$S_{xy} = \frac{1}{n} \sum (x_i - \mu_x)(y_i - \mu_y) = \text{covariance of } x_i \text{ and } y_i \quad (2.5)$$

Some elementary algebra results in the following useful identities.

$$\sum x_i = n\mu_x \quad (2.6)$$

$$\sum (x_i)^2 = nS_{xx} + n\mu_x^2 \quad (2.7)$$

$$\sum y_i = n\mu_y \quad (2.8)$$

$$\sum (y_i)^2 = nS_{yy} + n\mu_y^2 \quad (2.9)$$

$$\sum (x_i y_i) = nS_{xy} + n\mu_x \mu_y \quad (2.10)$$

These identities will be referred to repeatedly in the following sections. We shall assume that neither  $S_{xx}$  nor  $S_{yy}$  are zero (that both  $S_{xx}$  and  $S_{yy}$  are positive).

Finally, many quadratics will appear. Any quadratic  $Q(x)$  of the form (2.11).

$$Q(x) = A - 2Bx + Cx^2 \quad (2.11)$$

can be written as

$$Q(x) = (A - Cx_m^2) + C(x - x_m)^2$$

where

$$x_m = B/C \quad (2.12)$$

When  $C > 0$ , then the quadratic  $Q(x)$  has a minimum at  $x = x_m$ . It's minimum value is

$$Q(x_m) = A - Cx_m^2 \quad (2.13)$$

Eqns (2.12) and (2.13) will be referred to for the minimizing argument and minimum value of any quadratic that appears in the following sections.

### 3.0 FIRST DEFINITION OF BEST LINEAR APPROXIMATION

When the  $x$ 's are considered the independent variables, any line can be written in slope-intercept form as eqn (3.1)

$$y = mx + b \quad (3.1)$$

where  $m$  is the slope and  $b$  is the  $y$ -intercept. Each data point will, in general, not satisfy this equation but will leave residuals  $r_1, r_2, \dots, r_n$  where

$$r_i = y_i - mx_i - b, \quad i = 1, 2, \dots, n \quad (3.2)$$

The first definition of the best linear approximation is defined as that line where  $m$  and  $b$  minimize the sum of squared-residuals  $G$ :

$$G = \sum (r_i)^2 \quad (3.3)$$

The optimal line is determined in the following two steps. First, for any (fixed) slope  $m$ , the value of the  $y$ -intercept  $b$  which minimizes  $G$  is determined. To do this, substitute (3.2) into (3.3) then expand:

$$\begin{aligned} G &= \sum (y_i - mx_i - b)^2 \\ &= \sum (y_i - mx_i)^2 - 2 \sum (y_i - mx_i) b + \sum b^2 \end{aligned} \quad (3.4)$$

Now, equations (2.6) and (2.8) reduce eqn (3.4) to eqn (3.5).

$$G = \sum (y_i - mx_i)^2 - 2n(\mu_y - m\mu_x) b + nb^2 \quad (3.5)$$

This is a quadratic in  $b$  similar to eqn (2.11). Its minimum is given by eqn (3.6).

$$b_m = (\mu_y - m\mu_x) / n = \mu_y - m\mu_x \quad (3.6)$$

As an intermediate result, note that a horizontal line (constant function) is given by  $m = 0$ . In this event, the best value for  $b$  is  $\mu_y$  and the resulting value for  $G$  is

$$G = \sum (y_i)^2 - n\mu_y^2 = nS_{yy}$$

These results are summarized by Theorem 1.

**Theorem 1:** The best constant approximation to the  $y_i$  data points is given by  $\mu_y$ , the mean of the  $y_i$ . The "quality" of this approximation is given by the variance of  $y_i$ ,  $S_{yy} = G/n$ .

The second step is to use eqn (3.6) for the y-intercept in the formula for  $G$ , eqn (3.4). Eqn. (2.13) gives the value for  $G$  as eqn (3.7).

$$G = \sum (y_i - mx_i)^2 - n (\bar{y} - m\bar{x})^2 \quad (3.7)$$

Expanding this and using eqns (2.7), (2.9), and (2.10), eqn (3.7) reduces to eqn (3.8):

$$G = nS_{yy} - 2nS_{xy}m + nS_{xx}m^2 \quad (3.8)$$

This is a quadratic similar to eqn (2.11), hence its minimum occurs at

$$\frac{m}{m} = (nS_{xy}) / (nS_{xx}) = S_{xy} / S_{xx} \quad (3.9)$$

and its minimum value is:

$$\begin{aligned} G &= nS_{yy} - nS_{xx}\frac{m}{m}^2 \\ &= nS_{yy} - nS_{xy}^2 / S_{xx} \end{aligned} \quad (3.10)$$

Eqn (3.10) leads to the following definition of the "quality" of the approximation:

$$R = S_{xy}^2 / (S_{xx} S_{yy}) \quad (3.11)$$

With this value for  $R$ , eqn (3.10) becomes

$$G = nS_{yy} (1 - R) \quad (3.12)$$

Since both  $S_{xx}$  and  $S_{yy}$  are positive,  $R$  is positive. Since  $G$  is the sum of squared terms, it is positive and  $R$  is no greater than one. A value of zero for  $R$  says that a constant function is the best approximation to the  $y$ -data and a value of one for  $R$ , implying that  $G^2 = 0$  and every residual  $r_i = 0$ , occurs when the line passes through every data point. All this is contained in:

**Theorem 2:** The best linear approximation to the  $y_i$  data points is given by the line (3.13)

$$y = \bar{y} + S_{xy} (x - \bar{x}) / S_{xx} \quad (3.13)$$

and the "quality" of this approximation is given by the quantity  $R$  in eqn. (3.11).

#### 4.0 SECOND DEFINITION OF BEST LINEAR APPROXIMATION

The second definition of a "best" line is given when the  $y$ 's are considered the independent variables and the  $x$ 's are considered the dependent variables. This is simply an interchange of the roles of  $x$  and  $y$  from the previous section. The derivation of the equations follow in exactly the same order with  $x$  in place of  $y$  and  $y$  in place of  $x$ . The results are stated here:


Theorem 3: The best constant approximation to the  $x_i$  data points is given by  $\mu_x$ , the mean of the  $x_i$ . The "quality" of this approximation is given by the variance of  $x_i$ ,  $s_{xx}^2 = G^2/n$ .

Theorem 4: The best linear approximation to the  $x_i$  data points is given by the line (4.1)

$$x = \mu_x + s_{xy} (y - \mu_y) / s_{yy} \quad (4.1)$$

and the "quality" of this approximation is given by the quantity  $R$  in eqn (4.2)

$$R = s_{xy}^2 / (s_{yy} s_{xx}) \quad (4.2)$$

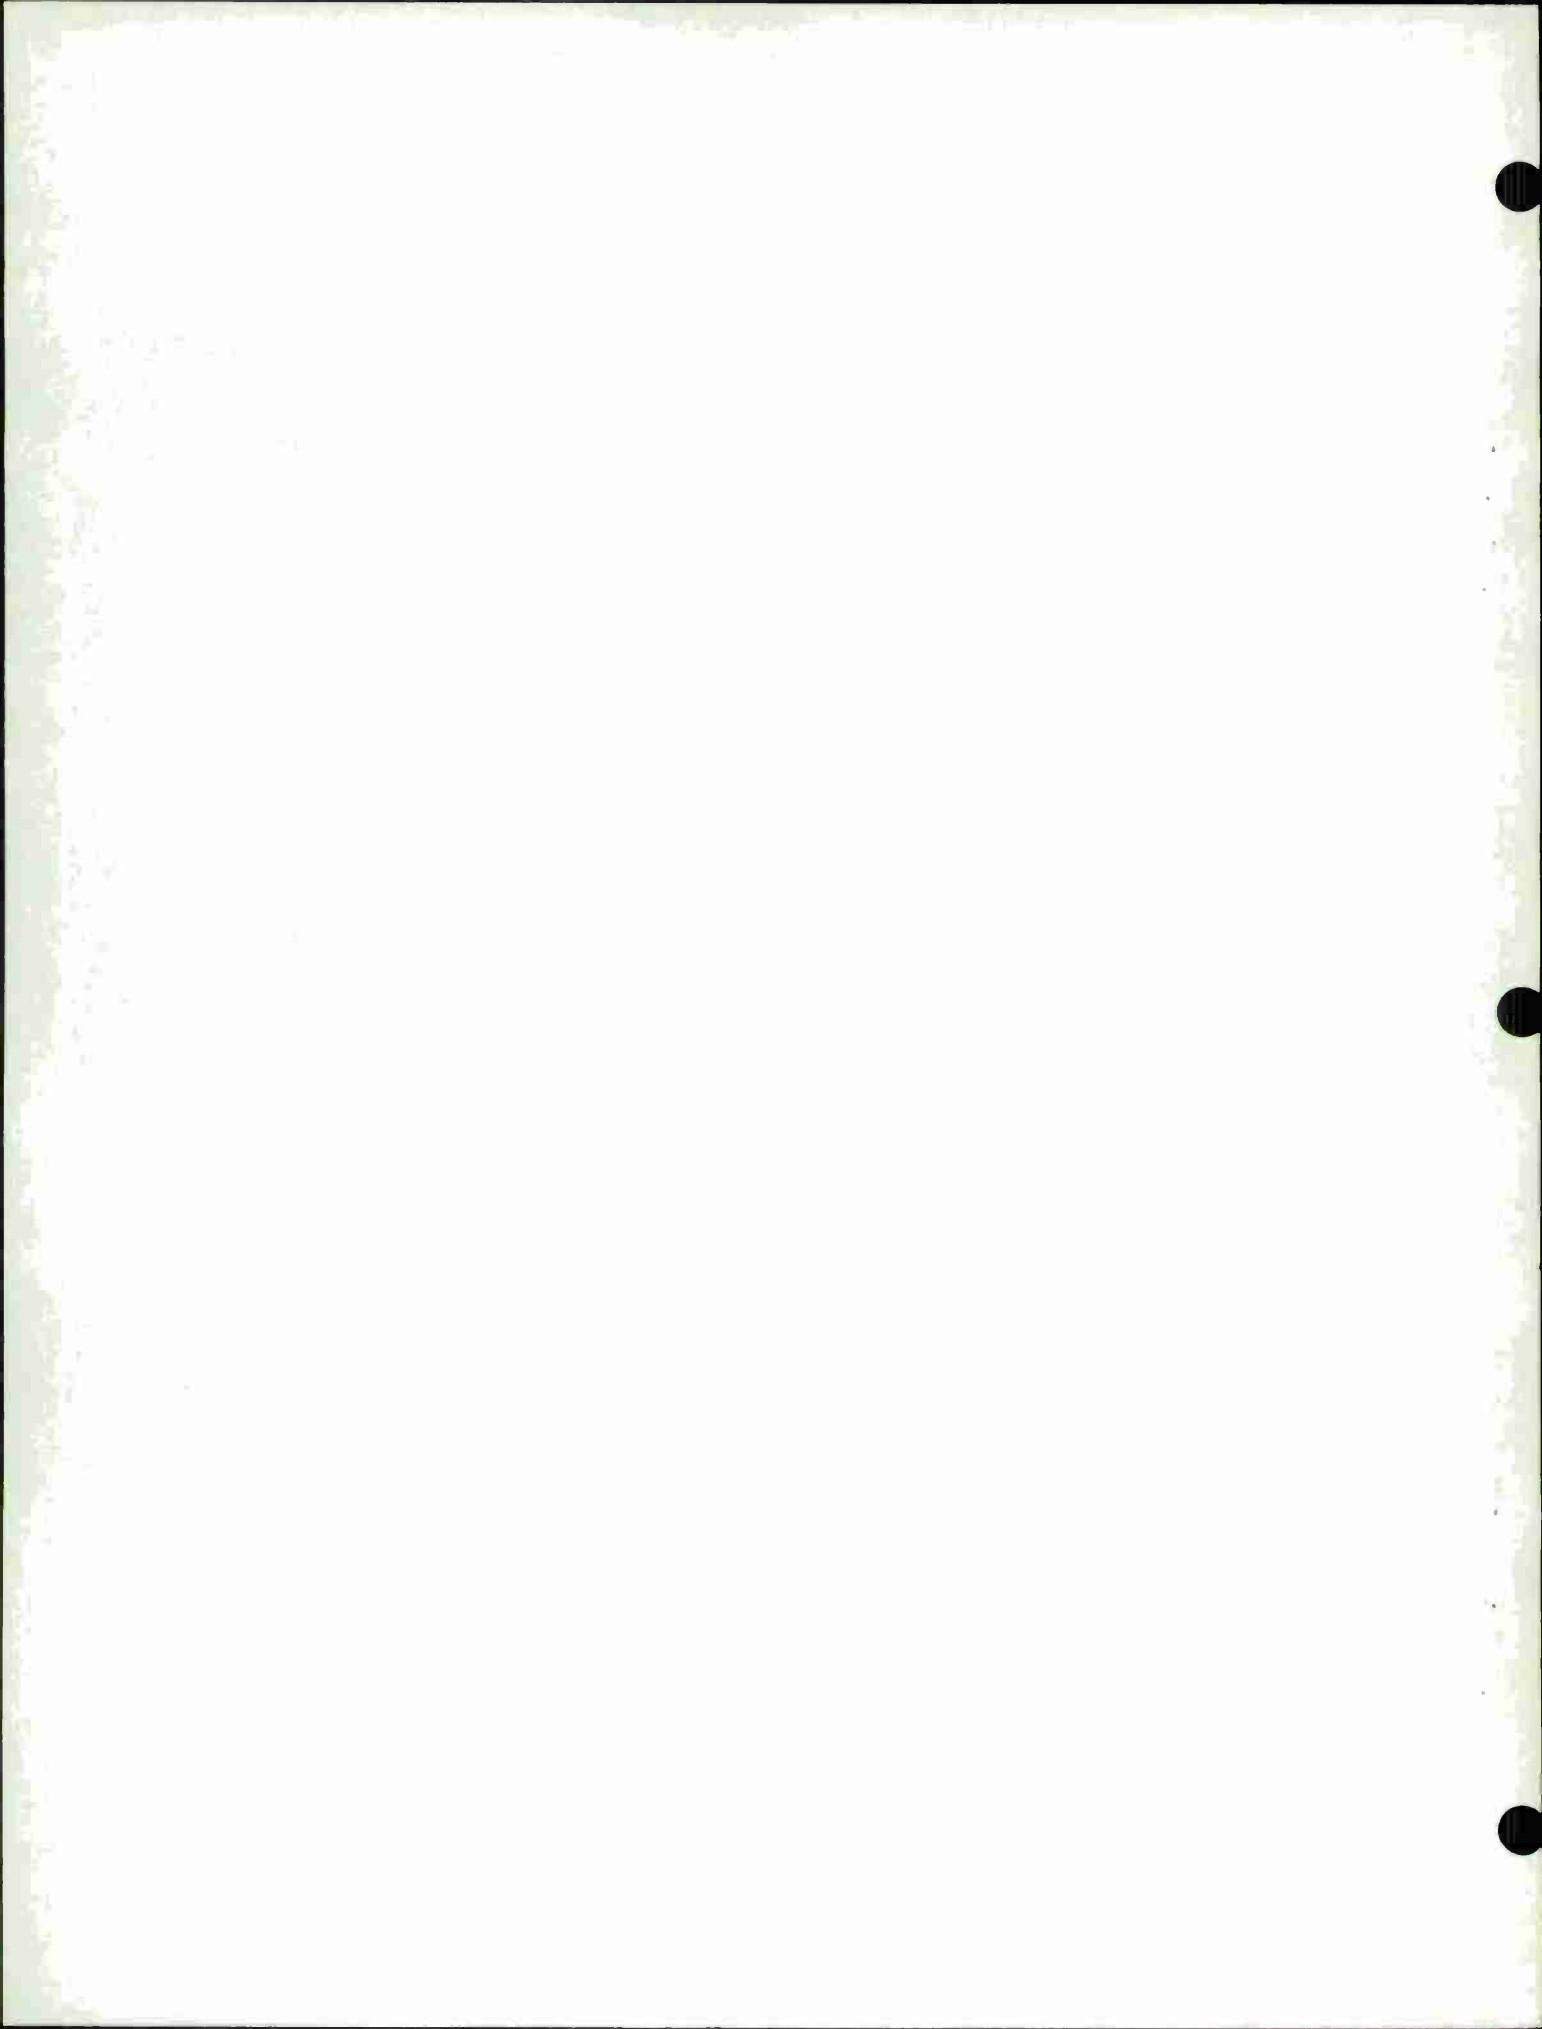

## 5.0 GEOMETRIC BEST LINEAR APPROXIMATION

The third definition of a "best" line is given when neither the x's nor the y's are given preference. The x's were given preference in Section 3.0 and the y's were given preference in Section 4.0. In each case, the distance from a point to a line, the residual, was measured parallel to one of the axis. In this section, since neither axis can be so chosen, the geometric distance from a point to a line must be used.

The derivation of the best geometric line is much easier if vector notation is used. Let  $P_1, P_2, \dots, P_n$  be the data points

$$P_i = \begin{bmatrix} x_i \\ y_i \end{bmatrix}, i = 1, 2, \dots, n \quad (5.1)$$

For any vector  $V$  let  $V^T$  denote the transpose of  $V$ .

In vector notation, any line can be represented in parametric form as

$$L = A + Dt \quad (5.2)$$

Where  $A$  and  $D$  are vectors and  $t$  is the independent parameter. For any point  $P$ , the distance from this line to  $P$ ,  $d(P, L)$ , is the minimum distance from  $P$  to points on the line. For any point on the line, the square of this distance is  $d^2$ :

$$d^2 = (P - A - Dt)^T (P - A - Dt) \quad (5.3)$$

which expands to:

$$d^2 = (P - A)^T (P - A) - 2 D^T (P - A) t + D^T D t^2 \quad (5.4)$$

Eqn (5.4) is a quadratic similar to eqn (2.11), hence its minimum occurs at

$$t_m = D^T (P - A) / (D^T D) \quad (5.5)$$

and its minimum value is

$$\begin{aligned} d(P, L)^2 &= (P - A)^T (P - A) - D^T D t_m^2 \\ &= (P - A)^T (P - A) - [D^T (P - A)]^2 / (D^T D) \quad (5.6) \end{aligned}$$

Since all vectors are real,  $D^T (P - A) = (P - A)^T D$  and equation (5.6) becomes

$$\begin{aligned} d(P, L)^2 &= (P - A)^T (P - A) - ((P - A)^T D) (D^T (P - A)) / D^T D \\ &= (P - A)^T \left[ I - DD^T / (D^T D) \right] (P - A) \end{aligned} \quad (5.7)$$

Where  $I$  is the identity matrix.

Given the data points  $P_1, P_2, \dots, P_n$ , the "best" line  $L$  is that line which minimizes the sum of the distances - square,  $G$ :

$$G = \sum d(P_i, L)^2 \quad (5.8)$$

Using eqn (5.7)

$$G = \sum (P_i - A)^T \left[ I - DD^T / (D^T D) \right] (P_i - A) \quad (5.9)$$

This "best" line is found in two steps. For the first step, fix the vector  $D$  and choose  $A$  so as to minimize eqn (5.9). For this purpose, let

$$M = I - DD^T / (D^T D) \quad (5.10)$$

and

$$A = A_0 + A_1 S \quad (5.11)$$

for arbitrary vectors  $A_0$  and  $A_1$  with  $S$  a real number. With this form for  $A$ , eqn (5.9) expands to

$$G = \sum (P_i - A_0)^T M (P_i - A_0) - 2 \sum A_1^T M (P_i - A_0) S + \sum A_1^T M A_1 S^2 \quad (5.12)$$

The vector  $A_0$  minimizes  $G$  if the linear term in (5.12) is zero for every vector  $A_1$ , i.e., if

$$\begin{aligned} \sum M (P_i - A_0) \\ = M (\sum P_i - n A_0) = 0 \end{aligned} \quad (5.13)$$

While there are many vectors  $A_0$  which satify (5.13), the obvious and easiest to use is the centroid:

$$A_0 = \sum P_i / n = \begin{bmatrix} \mu_x \\ \mu_y \end{bmatrix} \quad (5.14)$$

This result is summarized here.

Theorem 5: The best linear approximation to the data points passes through the centroid.

When the vector A is chosen as the centroid  $A_0$ , the value of G, eqn. (5.9), expands to become:

$$G = \sum (P_i - A_0)^T (P_i - A_0) - \sum (P_i - A_0)^T (D D^T) (P_i - A_0) / (D^T D) \quad (5.15)$$

The value for G is a minimum when the value for the second term in eqn (5.15) is a maximum, so attention will now focus on this second term, H.

$$H = \sum (P_i - A_0)^T (D D^T) (P_i - A_0) / (D^T D) \quad (5.16)$$

Since matrix multiplication is associative, H becomes

$$H = \sum \left[ (P_i - A_0)^T D \right] \left[ D^T (P_i - A_0) \right] / (D^T D) \quad (5.17)$$

Since  $(P_i - A_0)^T D = D^T (P_i - A_0)$ , H becomes

$$H = \sum \left[ D^T (P_i - A_0) \right] \left[ (P_i - A_0)^T D \right] / (D^T D) \quad (5.18)$$

Finally, using associativity once again

$$\begin{aligned} H &= \sum D^T \left[ (P_i - A_0) (P_i - A_0)^T \right] D / (D^T D) \\ &= D^T \left[ \sum (P_i - A_0) (P_i - A_0)^T \right] D / (D^T D) \end{aligned} \quad (5.19)$$

$A_0$  is the centroid so

$$\begin{aligned} (P_i - A_0) (P_i - A_0)^T &= \begin{bmatrix} x_i - \mu_x \\ y_i - \mu_y \end{bmatrix} \begin{bmatrix} x_i - \mu_x & y_i - \mu_y \end{bmatrix} \\ &= \begin{bmatrix} (x_i - \mu_x)^2 & (x_i - \mu_x)(y_i - \mu_y) \\ (y_i - \mu_y)(x_i - \mu_x) & (y_i - \mu_y)^2 \end{bmatrix} \end{aligned} \quad (5.20)$$

and the matrix in eqn (5.19) is the covariance matrix:

$$\sum (P_i - A_0) (P_i - A_0)^T = \begin{bmatrix} nS_{xx} & nS_{xy} \\ nS_{xy} & nS_{yy} \end{bmatrix} \quad (5.21)$$

The quantity H in eqn (5.19) is the Rayleigh Quotient for the covariance matrix (5.21), which attains a maximum equal to the largest eigenvalue of (5.21) when the vector D is a corresponding eigenvector. The theory of eigenvalues/eigenvectors would have to be used if the vectors  $P_i$  had more

than two components. In the case of only two components, let

$$D = \begin{bmatrix} \cos u \\ \sin u \end{bmatrix}$$

for some angle  $u$ . Then  $D^T D = \cos^2 u + \sin^2 u = 1$  and eqn (5.19) becomes

$$H = S_{xx} \cos^2 u + 2S_{xy} \cos u \sin u + S_{yy} \sin^2 u \quad (5.23)$$

Eqn (5.23) can be simplified by using the trigonometric identities

$$\cos 2u = 2 \cos^2 u - 1 = 1 - 2 \sin^2 u \quad (5.24)$$

and

$$\sin 2u = 2 \cos u \sin u$$

the simplified form for  $H$  becomes

$$\begin{aligned} H &= S_{xx} \frac{1}{2} (1 + \cos 2u) + S_{xy} \sin 2u + S_{yy} \frac{1}{2} (1 - \cos 2u) \\ &= \frac{1}{2} (S_{xx} + S_{yy}) + \frac{1}{2} (S_{xx} - S_{yy}) \cos 2u + S_{xy} \sin 2u \end{aligned} \quad (5.25)$$

Further simplification is achieved by defining  $r$  and  $u_0$  by eqns (5.26), (5.27), and (5.28).

$$r^2 = \frac{1}{4} (S_{xx} - S_{yy})^2 + S_{xy}^2 \quad (5.26)$$

$$r \cos 2u_0 = \frac{1}{2} (S_{xx} - S_{yy}) \quad (5.27)$$

$$r \sin 2u_0 = S_{xy} \quad (5.28)$$

Figure 1 gives a geometric interpretation to these equations.

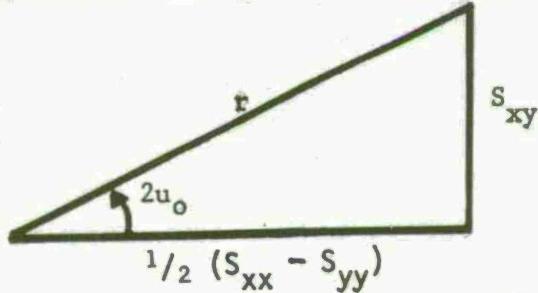


Figure 1 - Geometric definition of  $r$  and  $u_0$

Using these values for  $R$  and  $u_0$ ,  $H$  becomes

$$H = \frac{1}{2} (S_{xx} + S_{yy}) + r \cos(2u - 2u_0) \quad (5.29)$$

This is maximized by choosing  $u=u_0$ . For this value of  $u$ , the value of  $H$  becomes

$$H = \frac{1}{2} (S_{xx} + S_{yy}) + r \quad (5.30)$$

Since  $\Sigma (P_i - A_0)^T (P_i - A_0) = S_{xx} + S_{yy}$  the value of  $G$ , eqn. (5.15), becomes

$$\begin{aligned} G &= \Sigma (P_i - A_0)^T (P_i - A_0) - \frac{1}{2} (S_{xx} + S_{yy}) - r \\ &= \frac{1}{2} (S_{xx} + S_{yy}) - r \end{aligned} \quad (5.31)$$

Since  $r \geq 0$  and  $G \geq 0$ , equation (5.31) leads to an obvious definition for the "quality" of the approximation. These results are summarized in Theorem 6.

**Theorem 6:** The geometrically best linear approximation to the data points  $P_1, P_2, \dots, P_n$  is given as

$$L = A + Dt$$

where the vector  $A$  is the centroid of the data points:

$$A = \frac{\Sigma P_i}{n} \quad (5.32)$$

and the vector  $D$  has components

$$D = \begin{bmatrix} \cos u_0 \\ \sin u_0 \end{bmatrix} \quad (5.33)$$

where  $u_0$  satisfies eqns (5.26), (5.27), and (5.28). The quality of this linear approximation is given by eqn (5.34) where  $r$  is defined by eqn (5.26).

$$R = \frac{2r}{(S_{xx} + S_{yy})} \quad (5.34)$$

The formula  $L = A + Dt$  becomes

$$x = M_x + Ct \quad (5.35)$$

$$y = M_y + St$$

where  $C = \cos(u_0)$  and  $S = \sin(u_0)$  are defined by equations (5.26), (5.27), and (5.28). If the angle  $2u_0$  is constrained between  $-\pi$  and  $+\pi$ , then the formulas for  $C$  and  $S$  are

$$C = \sqrt{(1 + C_2)/2} \quad (5.36)$$

and

$$s = \text{sign}(s_{xy}) \sqrt{(1 - c_2)/2} \quad (5.37)$$

where

$$c_2 = \cos(2u_0) = (s_{xx} - s_{yy})/(2r) \quad (5.38)$$

and

$$r = \sqrt{\frac{1}{4} (s_{xx} - s_{yy})^2 + s_{xy}^2} \quad (5.39)$$

## 6.0 REVIEW OF THE THREE DEFINITIONS

For the purposes of clarity, the main results are copied here. When the x-axis is treated as the independent variable, the best approximation is given by eqn (3.13)

$$y = \mu_y + S_{xy} (x - \mu_x) / S_{xx} \quad (3.13)$$

and the "quality" by eqn (3.11).

$$R = S_{xy}^2 / (S_{xx} S_{yy}) \quad (3.11)$$

When the y-axis is treated as the independent variable, the best approximation is given by eqn (4.1)

$$x = \mu_x + S_{xy} (y - \mu_y) / S_{yy} \quad (4.1)$$

and the "quality" by eqn (4.2)

$$R = S_{xy}^2 / (S_{xx} S_{yy}) \quad (4.2)$$

When neither axis is treated as independent, the best approximation is given by eqn (5.35)

$$\begin{aligned} x &= \mu_x + Ct \\ y &= \mu_y + St \end{aligned} \quad (5.35)$$

where C and S are defined by eqns (5.36), (5.37), (5.38), and (5.39). The "quality" of this approximation is given by eqn (5.34).

$$R = \frac{2r}{(S_{xx} + S_{yy})} \quad (5.34)$$

In all cases, the values for the "quality" R will be between zero and one. A value of R near one indicates that the linear approximation is very good in that the sum of squared residuals will be very nearly zero. A value of R near zero indicates that the linear approximation is very poor in that the sum of squared residuals will be large. The value for R is not dependent on the magnitudes of the data points but only on how well the data can be approximated by a line. Acceptable values for R are a function of the type of problem being solved and the required accuracy of the linear approximation.

The different approximations come about because of different meanings for the phrase "distance from a point to a line." Figure 2 shows the

three definitions used in this report. When the x-axis is treated as the independent variables, eqns (3.13) and (3.11), the error distances are measured parallel to the y-axis,  $e_1$  in Figure 2. When the y-axis is treated as the independent variable, eqns (4.1) and (4.2), the error distances are measured parallel to the x-axis,  $e_2$  in Figure 2. When neither axis is treated as the independent variable, eqns (5.35) and (5.34), the error distances are measured perpendicular to the line,  $e_3$  in Figure 2. The choice between these three should be determined by the problem. If the data is such that one variable is clearly the independent variable and the other is dependent, then the appropriate formula, eqn (3.13) or eqn (4.1), should be used. The third method is useful when both variables are measured in the same units and there is no clear indication of which is the dependent variable.

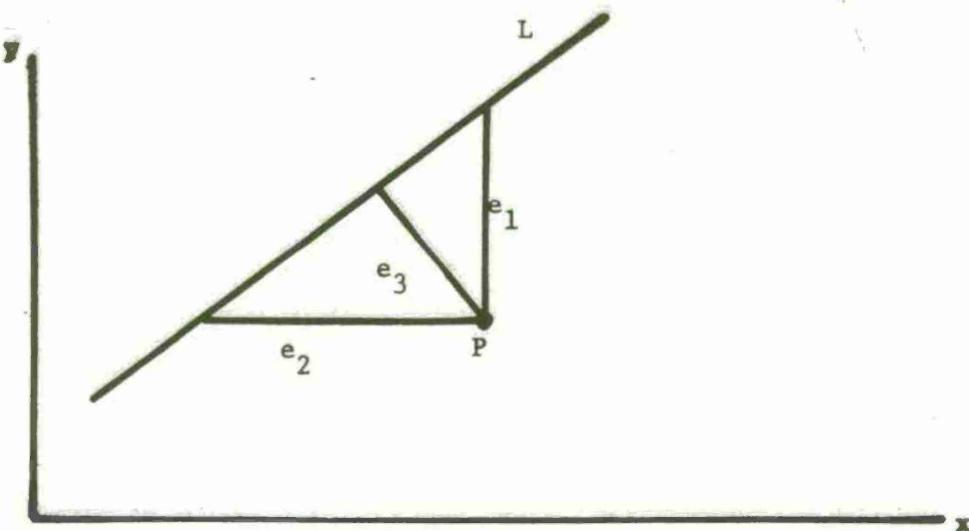


Figure 2 Three Distances From a Point to a Line

Comparing the three approximations is easier when the data has been translated and normalized such that  $\mu_x = \mu_y = 0$  and  $S_{xx} = S_{yy} = 1$  (subtract mean and divide by standard deviation). In this case, the co-variance  $S_{xy}$  is called the (linear) correlation coefficient. Eqns (3.13) and (3.11) reduce to  $y = S_{xy} x$  and  $R = S_{xy}^2$ . The "quality" is the square of the correlation coefficient. Eqns (4.1) and (4.2) reduce to  $x = S_{xy} y$  and  $R = S_{xy}^2$ . Eqns (5.35), (5.36), (5.37), (5.38), (5.39), and (5.34) quickly reduce to  $y = \text{sign}(S_{xy})x$  and  $R = |S_{xy}|$  if  $S_{xy} \neq 0$ . When  $S_{xy} = 0$ , there

is no best approximation and any line through the centroid will do as well as any other with a "quality" of  $R = 0$ . Note that, in this third case, the "quality" is the magnitude of the correlation coefficient, or the square root of the "quality" for the first two approximations. Indeed, whenever  $S_{xx} = S_{yy}$ , this third definition of "quality" will be the magnitude of the correlation coefficient. The first two definitions of "quality" are always the square of the correlation coefficient, so the three definitions of "quality" are best compared when the third definition has been squared. Note that the slopes for the three cases,  $S_{xy}$ ,  $1/S_{xy}$ , and  $\text{sign}(S_{xy})$ , are equal only when  $S_{xy} = 1$  or  $S_{xy} = -1$ . In all other cases, these three approximations lead to three different lines.

To illustrate the differences between these three linear approximations, two examples are discussed. The first example is a real application with the raw data shown in Table 1. The x-values are the lengths of subroutines (in binary bits) compiled on a CDC-6600 computer. The y-values are the lengths of these same subroutines (in binary bits) compiled on an IBM-370 computer. Both variables are measured in the same units (bits) and there is no clear indication which should be the dependent variable. This data, plotted in Figure 3, shows a strong linear relationship. The various statistics for this data are:

$$\begin{array}{ll} \mu_x = 7908.6 & \mu_y = 8347.4 \\ S_{xx} = 4.839 \times 10^7 & S_{yy} = 3.816 \times 10^7 \\ S_{xy} = 4.253 \times 10^7 & \end{array}$$

When the x-axis is chosen as the independent variable, the best linear approximation is

$$y = 1395.3 + 0.879x$$

with a "quality"  $R = .980$ . When the y-axis is chosen as the independent variable, the best linear approximation is

$$x = -1395.0 + 1.115y$$

with a "quality"  $R = .980$ . Solving this approximation for y gives

$$y = 1251.7 + 0.897x$$

which is a different line than the first approximation.

When neither axis is chosen as the independent variable, the best

TABLE 1 RAW DATA FOR EXAMPLE 1

#	x	y
1	13260	13680
2	1920	3168
3	3240	4480
4	2760	3856
5	11820	11840
6	4140	4736
7	3960	4432
8	9900	7592
9	10320	8560
10	1440	2448
11	3420	4624
12	1800	3184
13	19140	18520
14	6540	7328
15	16680	17808
16	3780	4160
17	7080	7168
18	14280	13696
19	5520	3600
20	31920	27936
21	24120	23600
22	1800	2816
23	10080	10272
24	2160	3536
25	1800	3344
26	1920	4176
27	6300	6656
28	6720	6896
29	2160	3120
30	4020	4768
31	8880	9696
32	6240	8160
33	17640	16736
34	10440	10352
35	7080	8160
36	1380	2656
37	4200	6080
38	22380	21984
39	3480	5008
40	10980	12256
41	3840	4768
42	1620	2736




Figure 3 Plot of Raw Data for Example 1

linear approximation is

$$x = 7908.6 + 0.748t$$

$$y = 8347.4 + 0.664t$$

with a "quality"  $R=0.990$  ( $R^2 = .980$ ). This last approximation, when solved for  $y$  in terms of  $x$ , gives

$$y = 1332.4 + 0.887x$$

which is a third line. All three lines pass through the centroid ( $\mu_x$ ,  $\mu_y$ ) of the data and have three different slopes (0.879, 0.897, and 0.887). These slopes differ by very little and the three "qualities" are very high (.980, .980, and .980) indicating that the linear approximations are very good.

The second example is contrived to show how different the three approximations can be. The raw data is given in Table 2. The various statistics for this data are:

$$\mu_x = 0.5 \quad \mu_y = 0.15$$

$$S_{xx} = 0.1 \quad S_{yy} = 0.0078$$

and

$$S_{xy} = 0$$

When the  $x$ -axis is chosen as the independent variable, the best linear approximation is

$$y = 0.15$$

with a "quality"  $R = 0$ . This is a horizontal line!

When the  $y$ -axis is chosen as the independent variable, the best linear approximation is

$$x = 0.5$$

with a "quality"  $R = 0$ . This is a vertical line!

When neither axis is chosen as the independent variable, the best linear approximation is

$$x = 0.5 + t$$


$$y = 0.15$$

and the "quality" is  $R = .85$  ( $R^2 = .72$ ). This is the same horizontal line

as the first linear approximation!

TABLE 2 RAW DATA FOR EXAMPLE 2

#	x	y	#	x	y
1	.0	.00	7	.6	.24
2	.1	.09	8	.7	.21
3	.2	.16	9	.8	.16
4	.3	.21	10	.9	.09
5	.4	.24	11	1.0	.00
6	.5	.25			



## A.0 APPENDIX - PROGRAM LISTING

```
10 REM "COMPUTE BEST LINEAR APPROXIMATIONS"
20 REM "CODED IN HP-9830 BASIC BY JAMES HURT 31 MAR 76"
30 DIM S[6]
40 REM "ZERO SUMS"
50 MAT S=ZER
60 REM "ENTER DATA"
70 DISP S[1];
80 INPUT X,Y
90 REM "TEST FOR END OF DATA"
100 IF X<0 THEN 210
110 REM "UPDATE SUMS"
120 S[1]=S[1]+1
130 S[2]=S[2]+X
140 S[3]=S[3]+X*X
150 S[4]=S[4]+Y
160 S[5]=S[5]+Y*Y
170 S[6]=S[6]+X*Y
180 REM "PRINT DATA"
190 PRINT S[1];X;Y
200 GOTO 60
210 REM "COMPUTE STATISTICS"
220 S[2]=S[2]/S[1]
230 S[3]=S[3]/S[1]-S[2]*S[2]
240 S[4]=S[4]/S[1]
250 S[5]=S[5]/S[1]-S[4]*S[4]
260 S[6]=S[6]/S[1]-S[2]*S[4]
270 REM "PRINT STATISTICS"
280 PRINT
290 PRINT S[1];"POINTS"
300 PRINT "MEANS";S[2];S[4]
310 PRINT "VARIANCES";S[3];S[5];S[6]
320 REM "COMPUTE STANDARD DEVIATIONS"
330 X=SQR(S[3])
340 Y=SQR(S[5])
350 REM "CORRELATION COEFFICIENT"
360 R=S[6]/(X*Y)
370 PRINT "STD. DEV.";X;Y;R
380 REM "X IS INDEPENDENT"
390 X=S[6]/S[3]
400 Y=S[4]-X*S[2]
410 PRINT "Y=";Y;"+"X*";X
420 REM "Y IS INDEPENDENT"
430 X=S[6]/S[5]
440 Y=S[2]-X*S[4]
450 PRINT "X=";Y;"+"Y*";X
460 REM "QUALITY"
470 R=S[6]*S[6]/(S[3]*S[5])
480 PRINT "QUALITY=";R
```

Program Listing (Cont'd)

```
490 REM "C2=COS(2*U0)"
500 X=(S[3]-S[5])/2
510 R=SQR(X*X+S[6]*S[6])
520 C2=X/R
530 REM "X=COS(U0) AND Y=SIN(U0)"
540 X=SQR((1+C2)/2)
550 Y=SQR((1-C2)/2)
560 IF S[6] >= 0 THEN 580
570 Y=-Y
580 PRINT
590 PRINT "X=";S[2];"+T*";X
600 PRINT "Y=";S[4];"+T*";Y
610 REM "QUALITY"
620 R=2*R/(S[3]+S[5])
630 PRINT "QUALITY=";R
640 PRINT
650 PRINT
660 PRINT
670 END
```


DISTRIBUTION LIST

A. Dept. of the Defense

Defense Documentation Center  
ATTN: TIPCR (12)  
Cameron Station  
Alexandria, VA 22314

B. Dept. of the Army

Commander  
Rock Island Arsenal  
ATTN: SARRI-L (1)  
SARRI-LPC (2)  
SARRI-LR (5)  
SARRI-LR-S (Hurt) (10)  
Rock Island, IL 61201



## DISTRIBUTION LIST UPDATE

- - - FOR YOUR CONVENIENCE - - -

Government regulations require the maintenance of up-to-date distribution lists for technical reports. This form is provided for your convenience to indicate necessary changes or corrections.

If a change in our mailing lists should be made, please check the appropriate boxes below. For changes or corrections, show old address exactly as it appeared on the mailing label. Fold on dotted lines, tape or staple the lower edge together, and mail.

Remove Name From List

Change or Correct Address

Old Address:

Corrected or New Address:

### COMMENTS

---

---

---

---

---

Date: \_\_\_\_\_ Signature: \_\_\_\_\_

Technical Report # R-TR-76-011

FOLD HERE

Return Address:

POSTAGE AND FEES PAID  
DEPARTMENT OF THE ARMY  
DOD 314



OFFICIAL BUSINESS  
Penalty for Private Use \$300

Commander  
Rock Island Arsenal  
Attn: SARRI-LR  
Rock Island, Illinois 61201

FOLD HERE

AD ACCESSION NO. RESEARCH DIRECTORATE, GENERAL THOMAS J. RODMAN LABORATORY  
Rock Island Arsenal, Illinois 61201

UNCLASSIFIED

Three Definitions of Best Linear Approximation

Prepared by: James J. Hurt  
Security Class. (of this report) Unclassified  
Technical Report R-TR-76-011

21 Pages, Incl Figures

Three definitions of best (in the least squares sense) linear approximation to given data points are presented. The relationships between these three are discussed along with their relationship to basic statistics such as mean values, the covariance matrix, and the (linear) correlation coefficient. For each of the three definitions, the best line is solved in closed form in terms of the data centroid and the covariance matrix.

AD ACCESSION NO. RESEARCH DIRECTORATE, GENERAL THOMAS J. RODMAN LABORATORY  
Rock Island Arsenal, Illinois 61201

UNCLASSIFIED

Three Definitions of Best Linear Approximation

Three Definitions of Best Linear Approximation

Prepared by: James J. Hurt  
Security Class. (of this report) Unclassified  
Technical Report R-TR-76-011

21 Pages, Incl Figures

Three definitions of best (in the least squares sense) linear approximation to given data points are presented. The relationships between these three are discussed along with their relationship to basic statistics such as mean values, the covariance matrix, and the (linear) correlation coefficient. For each of the three definitions, the best line is solved in closed form in terms of the data centroid and the covariance matrix.

AD ACCESSION NO. RESEARCH DIRECTORATE, GENERAL THOMAS J. RODMAN LABORATORY  
Rock Island Arsenal, Illinois 61201

UNCLASSIFIED

Three Definitions of Best Linear Approximation

Three Definitions of Best Linear Approximation


Prepared by: James J. Hurt  
Security Class. (of this report) Unclassified  
Technical Report R-TR-76-011

I. James J. Hurt  
II. Rock Island Arsenal  
III. Research Directorate  
General Thomas J. Rodman Laboratory  
Rock Island Arsenal

DISTRIBUTION

Approved for public release; distribution unlimited.



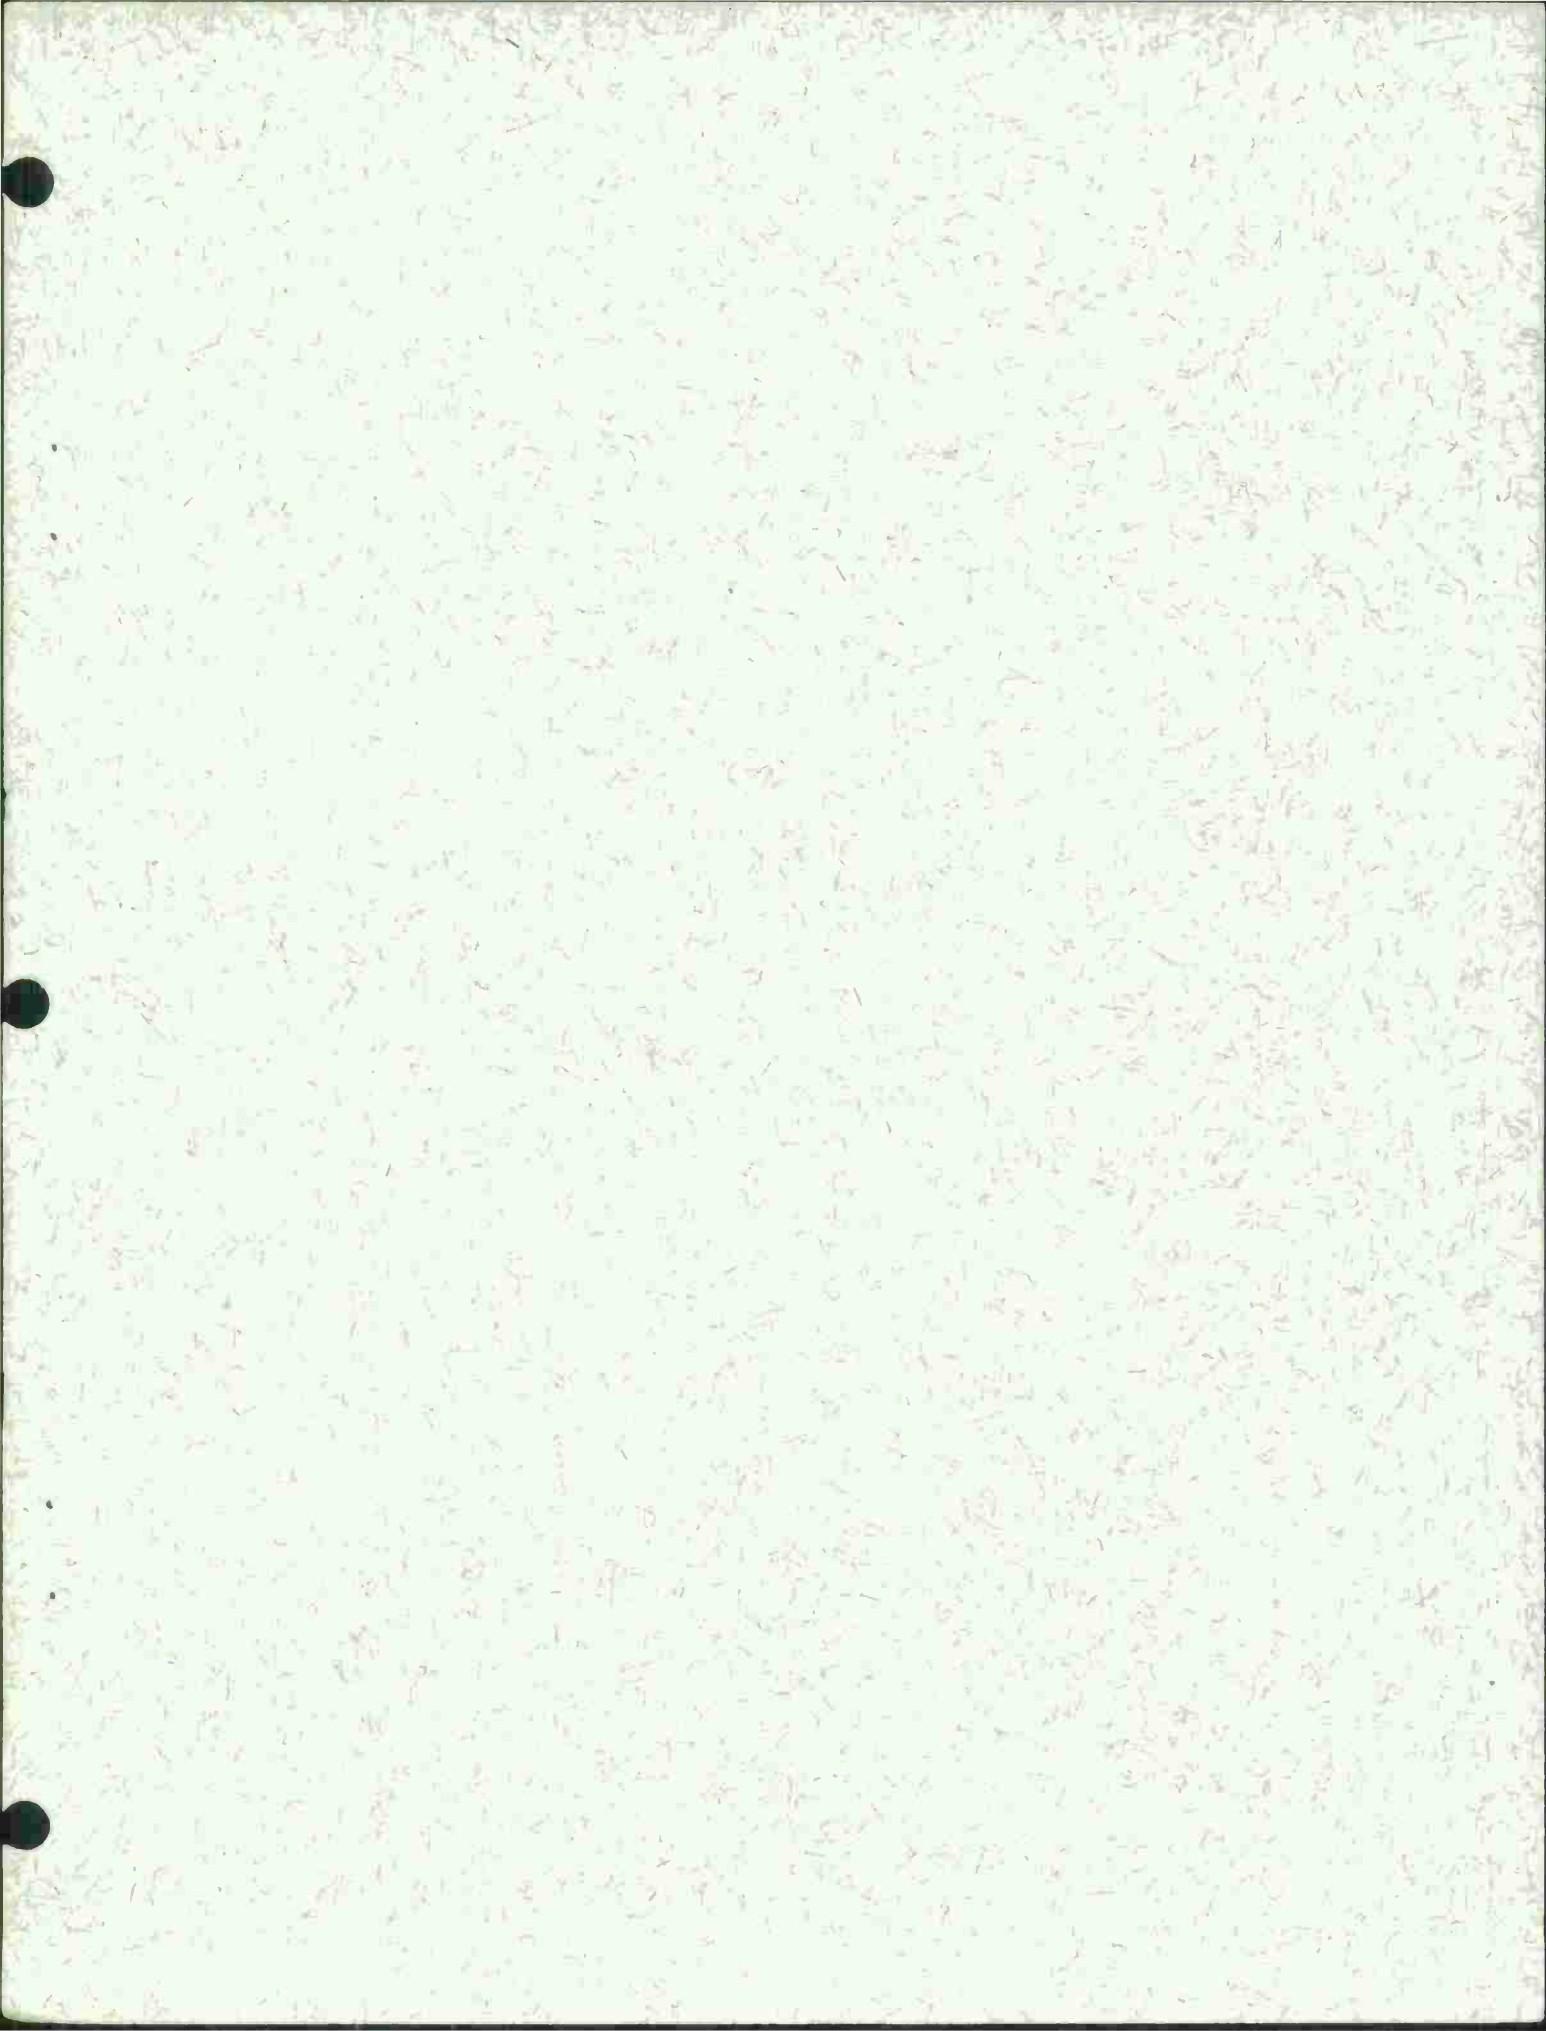

**DEPARTMENT OF THE ARMY**  
ROCK ISLAND ARSENAL  
ROCK ISLAND, ILLINOIS 61201

**OFFICIAL BUSINESS**  
PENALTY FOR PRIVATE USE. \$300.  
SARRI-LR

POSTAGE AND FEES PAID  
DEPARTMENT OF THE ARMY  
DoD 314

**SPECIAL FOURTH-CLASS RATE  
BOOK**

**POSTMASTER:** If Undeliverable (Section 159.41  
Postal Manual) Do Not Return